



DOMOS-K Boxes for Hollow Walls

Boxes for electrical components especially designed to be installed in plasterboard and prefabricated walls. Those boxes are designed for circuits under 400V in Alternate Current and maximum intensity of 16A.

Designed to be installed in plasterboard and prefabricated walls

Technical Features

- **Resistance to glow wire:** 850°C.
- **Range of atmosphere temperature:** -5 /+40°C.
- **Ball pressure test:** 70°C.
- **Maximum operation voltage:** 400V.

Certifications

According to Norm 2006/95/CE
Norm: UNE-EN 60670-1-22.

Materials

Auto-extinguishing PVC (free of Pb).
Colour: Yellow case. White lid RAL 9003.

Supply

Supplied in boxes with MOQ.

Boxes type D70 contain:

Fitted screws for assembling in hollow walls.

Boxes type CT contain:

Screwed lid and screws for hollow walls included in a bag inside the carton box. Reference CT115/K contains also partition wall. Reference CT217/K it is supplied with screws mounted.


Characteristics

- The case backside of the box has a guide which allows easily the drill position.
- Membranes for cable entries which keep the air tightness in the box when introducing cables or pipes (only in reference D70/1K and D70/2K).
- High rigidity materials that make easier to install.
- Mounting screws are provided with threaded triple step for easier installation.




Boxes for hollow walls

D70/1K




REFERENCE	DIMENSIONS	DIAMETER	ENTRY HOLES	PACK.
D70/1K	70x50	70	4xØ20 4xØ10	100

D70/2K





REFERENCE	DIMENSIONS	DIAMETER	ENTRY HOLES	PACK.
D70/2K	142x70x45	70	6xØ20 4xØ10 4xØ10x20	50

D70/3K

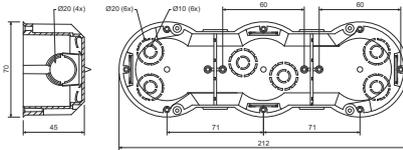



REFERENCE	DIMENSIONS	DIAMETER	ENTRY HOLES	PACK.
D70/3K	213x70x45	70	10xØ20 6xØ10 8xØ10x20	32

D70/4K

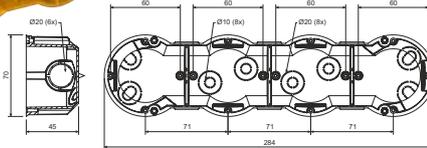

REFERENCE	DIMENSIONS	DIAMETER	ENTRY HOLES	PACK.
D70/4K	285x70x45	70	14xØ20 8xØ10 12xØ10x20	28



D70/5K

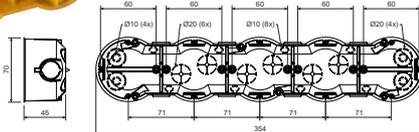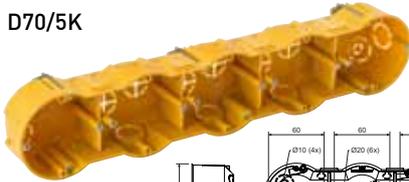

REFERENCE	DIMENSIONS	DIAMETER	ENTRY HOLES	PACK.
D70/5K	354x70x45	70	18xØ20 12xØ10 14xØ10x20	16


Junction boxes for hollow walls

CT115/K




REFERENCE	DIMENSIONS	DIAMETER	ENTRY HOLES	PACK.
CT115/K	115x115x45	40	4xØ20 12xØ10	28

CT155/K



REFERENCE	DIMENSIONS	DIAMETER	ENTRY HOLES	PACK.
CT155/K	155x155x64	40	8xØ30 4xØ16 6xØ25 20xØ10 14xØ20 8xØ10x20	27

CT217/K



REFERENCE	DIMENSIONS	DIAMETER	ENTRY HOLES	PACK.
CT217/K	234x176x79	40	Ø10-Ø40	12