

ATLANTIC PLUS SERIES

IP40 COMBINABLE STEEL DISTRIBUTION CABINETS

Description: IP40 COMBINABLE SURFACE DISTRIBUTION CABINET TRANSPARENT DOOR (216-288 MOD.) EMPTY

Reference:
40ENL216-288PT

Characteristics:

Product type:	Combinable surface distribution cabinet
Dimensions cabinet:	(AxBxC) 2110x730x250 mm
Installation:	Surface
Type of door:	Transparent door
Locking:	4-point lock, double-bit insert with retractable handle in RAL 7016 grey
Finish:	Coated with hardened epoxy-polyester paint, textured
Colour:	RAL 9003
Mounting plate:	Without mounting plate
Weight (kg):	67,9
Materials:	Cold-rolled steel EN 10130+A1
Thickness:	Enclosure: 1,2 mm. Glass door: 4 mm
Sealing gasket:	Injected polyurethane sealing gasket
Door material:	Tempered and tinted transparent glass
Capacity:	
Max. cabinet load:	
Max. mounting plate load:	
Max. door load:	

Technical data:

Degree of protection:	IP40
NEMA degree of protection:	
Resistance to impact:	IK09
Ambient temperature range:	-25 °C / +40 °C
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	



Codes:

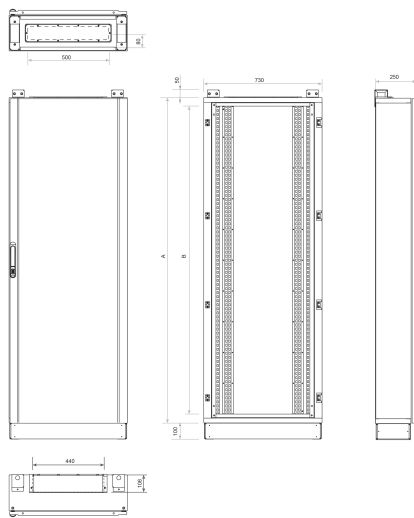
EAN:	8431044043753
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000058

ATLANTIC PLUS SERIES




IP40 COMBINABLE STEEL DISTRIBUTION CABINETS

Description: IP40 COMBINABLE SURFACE DISTRIBUTION CABINET TRANSPARENT DOOR (216-288 MOD.) EMPTY

Reference: 40ENL216-288PT



Standard drawing

Detailed drawing:  <http://www.ide.es/downloads/planos/pdf/40ENL216-288PT.pdf>
 <http://www.ide.es/downloads/planos/dxf/40ENL216-288PT.dxf>
 <http://www.ide.es/downloads/planos/stp/40ENL216-288PT.stp>

Cable entry:	(Width x Depth) 500x80 mm	Body to be flush-fitted:	-
Wall fixing:	-	Wall fixing material:	-
Inside usable space:	(B) 1900 mm	Glass door with transparent panel:	(HeightxWidth) 1810x5000 mm
No. Hinges:	-	Door profiles:	-

Sustainability:

RoHS - REACH

Supply:

They are supplied disassembled in a single packaging that contains body, sides, top and bottom cover, cable-entry cover, frame, plinth, door and accessory bag. Cabinets supplied with modular frame, without lids or DIN rail. 100-mm plinth included.

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Large facilities in the tertiary and residential sectors. for use indoors, shopping centres, hospitals, public buildings, etc.