

STAR

IP65 BOXES FOR INDUSTRIAL SOCKETS

Description: IP65 SURFACE BOX 1x9 MOD. TRANSP. WINDOW

Reference:
CSN9PT

Characteristics:

| | |
|--|--|
| Product type: | IP65 Boxes for industrial sockets |
| Exterior dimensions (Height x Width x Depth): | 436x210x137 mm |
| Dimensions of the flush-fit gap (HxWxD): | - |
| Number of modules: | 1x9 DIN rail |
| Installation: | Surface |
| Color: | RAL 7035 |
| Window: | Transparent |
| Weight (kg): | 1,39 |
| Cable entry: | Top: 4xM20 - 1xM40. Bottom: 4xM20 - 1xM40. Oblong rear: 2xOB25x25 |
| Components: | - |
| Materials: | Halogen-free plastic materials. Frame and base: ABS. Recommended for outdoor use: UV protection under ISO standard 4892-2, Method A: 500h. |
| Lid-window-door material: | Tinted PC, UV protection |

Technical data:

| | |
|-----------------------------------|-----------------------|
| Degree of protection: | IP65 |
| Resistance to impact: | IK08 |
| Glow wire resistance: | 650 °C |
| Ball pressure test: | 70 °C |
| Ambient temperature range: | -25 °C / +40 °C |
| Maximum operating voltage: | 1000 V AC / 1500 V DC |
| Rated current: | |
| Double insulation: | Class II |

Certificates and standards:

| | |
|----------------------|------------------------|
| Directive: | 2014/35/EU |
| Standards: | IEC 62208, IEC 61439-1 |
| Certificates: | |



Codes:


| | |
|-------------------------------|---------------|
| EAN: | 8431044243542 |
| Customs tariff number: | 85.38.10.00 |
| ETIM 8.0: | EC000379 |

STAR


IP65 BOXES FOR INDUSTRIAL SOCKETS

Description: IP65 SURFACE BOX 1x9 MOD. TRANSP. WINDOW

Reference: CSN9PT

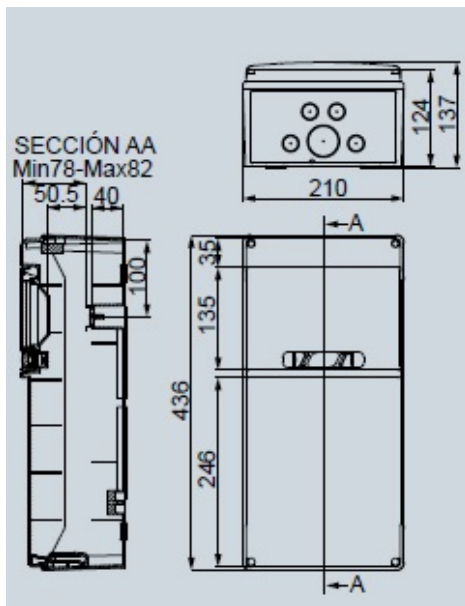

Detailed drawing:

 <http://www.ide.es/downloads/planos/pdf/CSN9PT.pdf>

 <http://www.ide.es/downloads/planos/dxf/CSN9PT.dxf>

 <http://www.ide.es/downloads/planos/stp/CSN9PT.stp>

Exterior dimensions (Height x Width x Depth):

436x210x137 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

-

Sustainability:

RoHS - REACH

Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film.

Packaging units: 5

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Industrial and outdoor environments. Industrial sites, docks, swimming pools, garages, anywhere that requires a high degree of protection against dust, splashes and impacts.