

# ARGENTA PLUS SERIES

## IP55 STEEL FLOOR-STANDING COMBINABLE CABINETS (ENL)

Description: IP55 COMBINABLE FLOOR-STANDING CABINET (ENL) 1800x1200x500  
DOUBLE OPAQUE DOOR WITHOUT PLATE

Reference:  
**ENL18012050PO/DC**

### Characteristics:

<b>Product type:</b>	Steel floor-standing combinable cabinets (ENL)
<b>Dimensions cabinet:</b>	(AxBxC) 1800x1200x500 mm
<b>Installation:</b>	Surface
<b>Type of door:</b>	Symmetrical opaque double door
<b>Locking:</b>	Double lock. 2-point 1/4 turn interior double lock and double-bit exterior insert with handle in RAL 7016 grey
<b>Finish:</b>	Coated with primer, and hardened polyester paint, textured, with UV protection
<b>Colour:</b>	RAL 7035
<b>Mounting plate:</b>	Without mounting plate
<b>Weight (kg):</b>	133,1
<b>Materials:</b>	Cold-rolled steel EN 10130+A1
<b>Thickness:</b>	Enclosure: 1,5 mm. Door: 2 mm. Cable entry lid: 1,2 mm.
<b>Sealing gasket:</b>	Injected polyurethane sealing gasket
<b>Door material:</b>	
<b>Capacity:</b>	
<b>Max. cabinet load:</b>	
<b>Max. mounting plate load:</b>	
<b>Max. door load:</b>	

### Technical data:

<b>Degree of protection:</b>	IP55
<b>NEMA degree of protection:</b>	NEMA 1, 12
<b>Resistance to impact:</b>	IK10
<b>Ambient temperature range:</b>	-25 °C / +60 °C
<b>Maximum operating voltage:</b>	1000 V AC / 1500 V DC

### Certificates and standards:

<b>Directive:</b>	2014/35/EU
<b>Standards:</b>	IEC 62208, IEC 61439-1
<b>Certificates:</b>	UL508A



### Codes:


<b>EAN:</b>	8431044010441
<b>Customs tariff number:</b>	85.38.10.00
<b>ETIM 8.0:</b>	EC000261

# ARGENTA PLUS SERIES

## IP55 STEEL FLOOR-STANDING COMBINABLE CABINETS (ENL)

Description: IP55 COMBINABLE FLOOR-STANDING CABINET (ENL) 1800x1200x500 DOUBLE OPAQUE DOOR WITHOUT PLATE

Reference: ENL18012050PO/DC

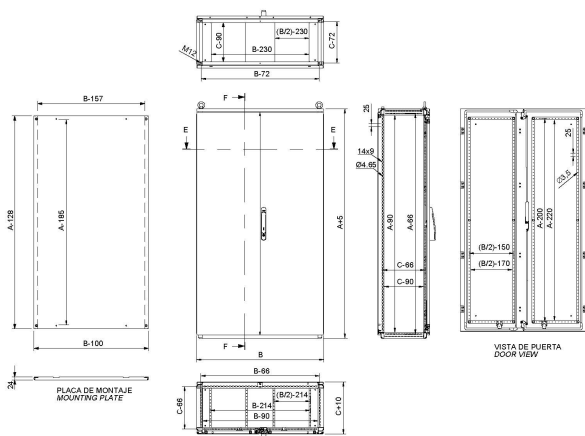

Standard drawing

**Detailed drawing:** <https://www.ide.es/downloads/planos/pdf/ENL18012050PODC.pdf>  
<https://www.ide.es/downloads/planos/dxf/ENL18012050PODC.dxf>  
<https://www.ide.es/downloads/planos/stp/ENL18012050PODC.stp>

**Cable entry:** (Width x Depth) 970x410 mm  
**Wall fixing:** -  
**Inside usable space:** (HeightxWidthxDepth) 1710x1110x410 mm  
**No. Hinges:**

**Body to be flush-fitted:** -  
**Wall fixing material:**  
**Glass door with transparent panel:** -  
**Door profiles:**

### Sustainability:

RoHS - REACH

### Supply:

Supplied on pallets, protected with honeycomb cardboard corner pieces and shrink-wrap film. It includes 2 lifting eyebolts fitted and cable entry lids. Supplied without mounting plate or side panels.

### Product end of life:

It does not require specific recycling operations.

### Recommended applications:

Industrial environments, manufacturing companies requiring a high degree of protection against dust, splashes and impacts.