

ARGENTA PLUS SERIES

IP55 STEEL FLOOR-STANDING COMBINABLE CABINETS (ENL)

Description: IP55 COMBINABLE FLOOR-STANDING CABINET (ENL) 1800x600x600
OPAQUE DOOR WITHOUT PLATE

Reference:
ENL1806060PO/SP

Characteristics:

| | |
|----------------------------------|--|
| Product type: | Steel floor-standing combinable cabinets (ENL) |
| Dimensions cabinet: | (AxBxC) 1800x600x600 mm |
| Installation: | Surface |
| Type of door: | Single opaque door |
| Locking: | 4-Point double-bit insert with retractable handle in RAL 7016 grey |
| Finish: | Coated with primer, and hardened polyester paint, textured, with UV protection |
| Colour: | RAL 7035 |
| Mounting plate: | Without mounting plate |
| Weight (kg): | 79,8 |
| Materials: | Cold-rolled steel EN 10130+A1 |
| Thickness: | Enclosure: 1,5 mm. Door: 2 mm. Cable entry lid: 1,2 mm. |
| Sealing gasket: | Injected polyurethane sealing gasket |
| Door material: | |
| Capacity: | |
| Max. cabinet load: | |
| Max. mounting plate load: | |
| Max. door load: | |

Technical data:

| | |
|-----------------------------------|-----------------------|
| Degree of protection: | IP55 |
| NEMA degree of protection: | NEMA 1, 12 |
| Resistance to impact: | IK10 |
| Ambient temperature range: | -25 °C / +60 °C |
| Maximum operating voltage: | 1000 V AC / 1500 V DC |

Certificates and standards:

| | |
|----------------------|------------------------|
| Directive: | 2014/35/EU |
| Standards: | IEC 62208, IEC 61439-1 |
| Certificates: | UL508A |



Codes:

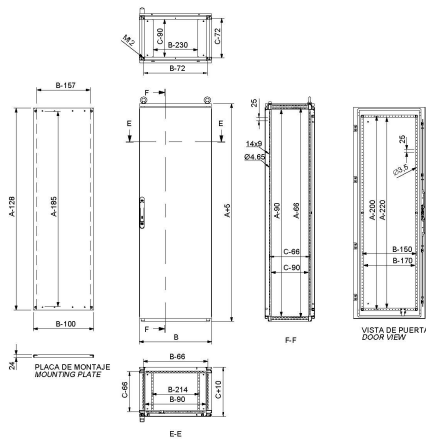
| | |
|-------------------------------|---------------|
| EAN: | 8431044117300 |
| Customs tariff number: | 85.38.10.00 |
| ETIM 8.0: | EC000261 |

ARGENTA PLUS SERIES




IP55 STEEL FLOOR-STANDING COMBINABLE CABINETS (ENL)

Description: IP55 COMBINABLE FLOOR-STANDING CABINET (ENL) 1800x600x600 OPAQUE DOOR WITHOUT PLATE

Reference: ENL1806060PO/SP



Standard drawing

- Detailed drawing:**
-  <https://www.ide.es/downloads/planos/pdf/ENL1806060POSP.pdf>
 -  <https://www.ide.es/downloads/planos/dxf/ENL1806060POSP.dxf>
 -  <https://www.ide.es/downloads/planos/stp/ENL1806060POSP.stp>

| | | | |
|-----------------------------|--------------------------------------|---|---|
| Cable entry: | (Width x Depth) 370x510 mm | Body to be flush-fitted: | - |
| Wall fixing: | - | Wall fixing material: | - |
| Inside usable space: | (HeightxWidthxDepth) 1710x510x510 mm | Glass door with transparent panel: | - |
| No. Hinges: | | Door profiles: | |

Sustainability:

RoHS - REACH

Supply:

Supplied on pallets, protected with honeycomb cardboard corner pieces and shrink-wrap film. It includes 2 lifting eyebolts fitted and cable entry lids. Supplied without mounting plate or side panels.

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Industrial environments, manufacturing companies requiring a high degree of protection against dust, splashes and impacts.