

# ARGENTA PLUS SERIES

## IP55 STEEL FLOOR-STANDING COMBINABLE CABINETS (ENL)

Description: IP55 COMBINABLE FLOOR-STANDING CABINET (ENL) 2000x600x400  
OPAQUE DOOR WITHOUT PLATE

Reference:  
**ENL2006040PO/SP**

### Characteristics:

<b>Product type:</b>	Steel floor-standing combinable cabinets (ENL)
<b>Dimensions cabinet:</b>	(AxBxC) 2000x600x400 mm
<b>Installation:</b>	Surface
<b>Type of door:</b>	Single opaque door
<b>Locking:</b>	4-Point double-bit insert with retractable handle in RAL 7016 grey
<b>Finish:</b>	Coated with primer, and hardened polyester paint, textured, with UV protection
<b>Colour:</b>	RAL 7035
<b>Mounting plate:</b>	Without mounting plate
<b>Weight (kg):</b>	82,1
<b>Materials:</b>	Cold-rolled steel EN 10130+A1
<b>Thickness:</b>	Enclosure: 1,5 mm. Door: 2 mm. Cable entry lid: 1,2 mm.
<b>Sealing gasket:</b>	Injected polyurethane sealing gasket
<b>Door material:</b>	
<b>Capacity:</b>	
<b>Max. cabinet load:</b>	
<b>Max. mounting plate load:</b>	
<b>Max. door load:</b>	

### Technical data:

<b>Degree of protection:</b>	IP55
<b>NEMA degree of protection:</b>	NEMA 1, 12
<b>Resistance to impact:</b>	IK10
<b>Ambient temperature range:</b>	-25 °C / +60 °C
<b>Maximum operating voltage:</b>	1000 V AC / 1500 V DC

### Certificates and standards:

<b>Directive:</b>	2014/35/EU
<b>Standards:</b>	IEC 62208, IEC 61439-1
<b>Certificates:</b>	UL508A



### Codes:


<b>EAN:</b>	8431044117409
<b>Customs tariff number:</b>	85.38.10.00
<b>ETIM 8.0:</b>	EC000261

# ARGENTA PLUS SERIES

## IP55 STEEL FLOOR-STANDING COMBINABLE CABINETS (ENL)

Description: IP55 COMBINABLE FLOOR-STANDING CABINET (ENL) 2000x600x400 OPAQUE DOOR WITHOUT PLATE

Reference: ENL2006040PO/SP

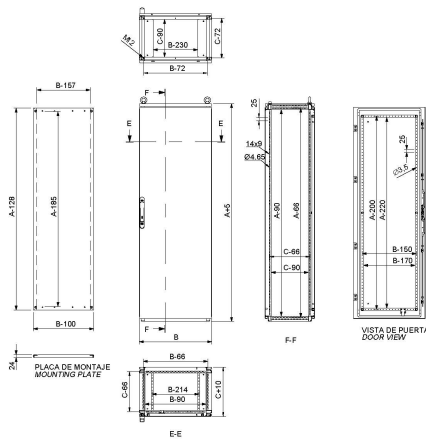

Standard drawing

- Detailed drawing:**
- <https://www.ide.es/downloads/planos/pdf/ENL2006040POSP.pdf>
  - <https://www.ide.es/downloads/planos/dxf/ENL2006040POSP.dxf>
  - <https://www.ide.es/downloads/planos/stp/ENL2006040POSP.stp>

<b>Cable entry:</b>	(Width x Depth) 370x310 mm	<b>Body to be flush-fitted:</b>	-
<b>Wall fixing:</b>	-	<b>Wall fixing material:</b>	-
<b>Inside usable space:</b>	(HeightxWidthxDPTH) 1910x510x310 mm	<b>Glass door with transparent panel:</b>	-
<b>No. Hinges:</b>		<b>Door profiles:</b>	

### Sustainability:

RoHS - REACH

### Supply:

Supplied on pallets, protected with honeycomb cardboard corner pieces and shrink-wrap film. It includes 2 lifting eyebolts fitted and cable entry lids. Supplied without mounting plate or side panels.

### Product end of life:

It does not require specific recycling operations.

### Recommended applications:

Industrial environments, manufacturing companies requiring a high degree of protection against dust, splashes and impacts.