

# ARGENTA SERIES

## IP55 STEEL WALL-MOUNTING CABINETS

Description: IP55 ROLLED STEEL WALL-MOUNTING CABINET 1200x1000x400 DOUBLE OPAQUE DOOR

Reference:  
**GN12010040/PD**

### Characteristics:

|                                  |  |
|----------------------------------|--|
| <b>Product type:</b>             | Wall-mounting cabinet  |
| <b>Dimensions cabinet:</b>       | (AxBxC) 1200x1000x400 mm   |
| <b>Installation:</b>             | Surface  |
| <b>Type of door:</b>             | Double opaque door. Reversible   |
| <b>Locking:</b>                  | 5-mm double-bit lock - One 3-points lock                                       |
| <b>Finish:</b>                   | Coated with primer, and hardened polyester paint, textured, with UV protection |
| <b>Colour:</b>                   | RAL 7035   |
| <b>Mounting plate:</b>           | With flat mounting plate. 2-mm galvanised sheet steel                          |
| <b>Weight (kg):</b>              | 82,2   |
| <b>Materials:</b>                | Cold-rolled steel EN 10130+A1  |
| <b>Thickness:</b>                | Enclosure: 1,5 mm. Door: 2 mm. Cable entry lid: 2 mm.                          |
| <b>Sealing gasket:</b>           | Injected polyurethane sealing gasket   |
| <b>Door material:</b>            |  |
| <b>Capacity:</b>                 |  |
| <b>Max. cabinet load:</b>        |  |
| <b>Max. mounting plate load:</b> |  |
| <b>Max. door load:</b>           |  |

### Technical data:

|                                   |                       |
|-----------------------------------|-----------------------|
| <b>Degree of protection:</b>      | IP55                  |
| <b>NEMA degree of protection:</b> | NEMA 1, 12            |
| <b>Resistance to impact:</b>      | IK10                  |
| <b>Ambient temperature range:</b> | -25 °C / +60 °C       |
| <b>Maximum operating voltage:</b> | 1000 V AC / 1500 V DC |

### Certificates and standards:

|                      |                        |
|----------------------|------------------------|
| <b>Directive:</b>    | 2014/35/EU             |
| <b>Standards:</b>    | IEC 62208, IEC 61439-1 |
| <b>Certificates:</b> | UL508A                 |



### Codes:


|                               |               |
|-------------------------------|---------------|
| <b>EAN:</b>                   | 8431044029795 |
| <b>Customs tariff number:</b> | 85.38.10.00   |
| <b>ETIM 8.0:</b>              | EC000261      |

# ARGENTA SERIES

## IP55 STEEL WALL-MOUNTING CABINETS

Description: IP55 ROLLED STEEL WALL-MOUNTING CABINET 1200x1000x400 DOUBLE OPAQUE DOOR

Reference: GN12010040/PD

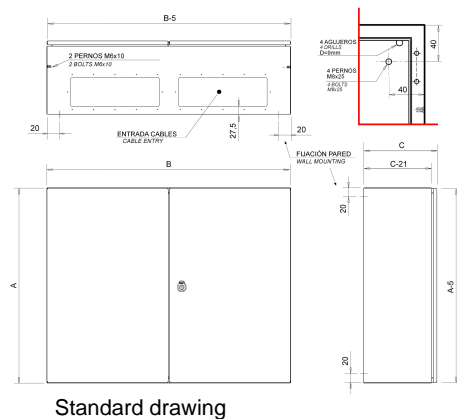

**Detailed drawing:**  <http://www.ide.es/downloads/planos/pdf/GN12010040PD.pdf>  
 <http://www.ide.es/downloads/planos/dxf/GN12010040PD.dxf>  
 <http://www.ide.es/downloads/planos/stp/GN12010040PD.stp>

**Cable entry:** (DxE) 125x885 mm  
**Wall fixing:** (HeightxWidth) 760x960 mm  
**Inside usable space:** (HeightxWidthxDepth) 1150x950x379 mm  
**No. Hinges:** 6

**Body to be flush-fitted:** -  
**Wall fixing material:** -  
**Glass door with transparent panel:** -  
**Door profiles:** 4

### Sustainability:

RoHS - REACH

### Supply:

Supplied in individual packaging containing cabinet, plate and accessory bag. Mounting plate is supplied assembled inside the cabinet.

### Product end of life:

It does not require specific recycling operations.

### Recommended applications:

Industrial environments, manufacturing companies requiring a high degree of protection against dust, splashes and impacts.